



Paroil E

Mineral engine oil

Paroil E is a high-performance engine oil intended for the lubrication of all diesel engines as used in our compressors and generators. It meets stringent quality control specifications to ensure your equipment will run smoothly and reliably.

- Superb anti-wear and corrosion protection
- Extremely high oxidation stability
- Balanced composition
- Protection against the harmful effects of soot
- Quality lubricant additives




Performance:

Performance	Method	Unit	Value
SAE viscosity grade	SAE J 300		15W40
Kinematic viscosity at 40°C	ASTM D 445	mm ² /s	105.1
Kinematic viscosity at 100°C	ASTM D 445	mm ² /s	14.3
Viscosity index	ASTM D 2270		139
Density at 15°C	ISO 3675	kg/dm ³	0.886
Flash point COC	ASTM D 92	°C	230
Pour point	ASTM D 97	°C	-39

Paroil E is optimized for the latest low-emission engines meeting Euro 5, 4, 3, 2 and US 2002 emission requirements. Further specifications: API CI-4, CH-4, CG-4, CF-4, CF.SL

Capacity:

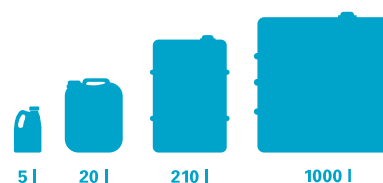

Capacity	Part number
5 l	1615 5953 00
20 l	1615 5954 00
210 l	1615 5955 00
1000 l	1630 0096 00

Equipment:

Atlas Copco portable compressors, generators, pumps and light towers.



Ambient temperature range: -15°C to 40°C
5°F to 104°F



Service intervals:
See user manual